

NØDLYSARMATUR ACCENTA ONTEC R - W2

Asymmetrisk armatur for belysning av trapp, brandsluknings- og sikkerhetsutstyr.


- 5 lux i trapp eller på brandsluknings- og sikkerhetsutstyr.
- IP65, 477lm.
- For trapp monteres den på vegg 2m opp, i mitten på trappen.



Artikkelnummer	Navn	Drift	Selvtest	Adresserbar
777703	ONTEC R W2 105 M AT ASYM B/T	Batteriarmanatur (LiFePO4/C 6,4V 1,5 Ah)	Ja	Nei
777704	ONTEC R W2 105 M DATA 2 ASYM B	Batteriarmanatur (LiFePO4/C 6,4V 1,5 Ah)	Ja	Ja
777705	ONTEC R W2 05 CB1 ASYM B/T	Sentral	Nei	Nei
777706	ONTEC R W2 05 CB3 ASYM OVERVÅKET	Sentral	Nei	Ja

MÅL / MONTERINGSAVSTAND

Mål i mm

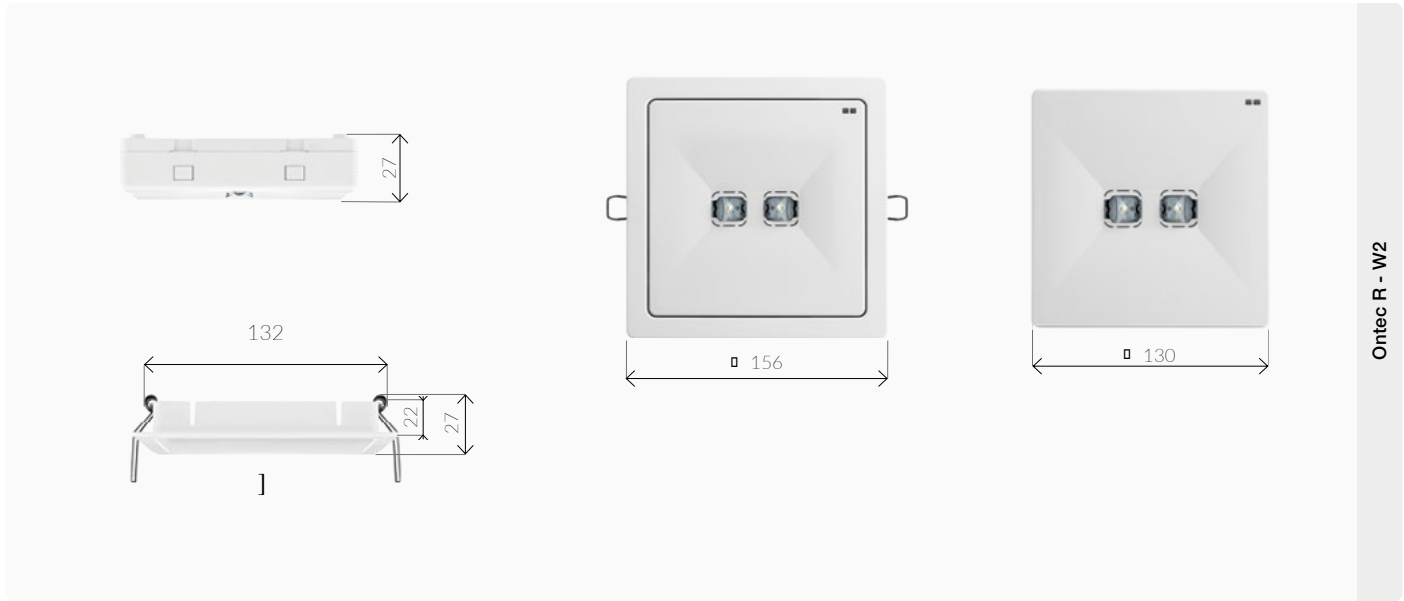

TILBEHØR

Art. nr: 777808

Innfellings sett for Ontec R.





TEKNISKE DATA

Lyskilde	2 LED / 5W
Batteritid	1h
Innkobling	Permanent lys (ML) / beredskaps lys (LL)
Luminans	447 lm
Driftsspenning (V)	Desentralisert: 210 – 250 V AC, 50 – 60Hz Sentral: 210 – 250 V AC, 50 – 60Hz, 186 – 254 V DC
IP-klasse	IP20
Beskyttelsesklasse	II
Tillatt omgivelsestemperatur	ta +10 °C – +40 °C CB, ta -25 °C – +55 °C
Farge	○ RAL 9003 (● Spesialfarge kan bestilles)
Batteritype	LiFePO4/C 6,4 V 1,5 Ah

PROSJEKTERINGSGUIDE

E = 1,0 Lux Måle høyde: 0,02 m, Vedlikeholds faktor MF = 0,9.

[m]	A	B
2,5	4,2	9,5
3,0	4,8	10,5
4,0	5,3	12,3
5,0	5,7	14,0
6,0	5,6	14,9
7,0	4,2	15,2
8,0	3,1	14,5

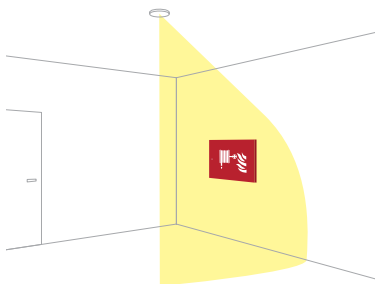



SERTIFIKAT

PN-EN 60598-1	PN-EN 61000-3-2
PN-EN 60598-2-22	PN-EN 62031
PN-EN 61347-1	PN-EN 62471
PN-EN 61347-2-7	PN-EN 1838
PN-EN 61347-2-13	
PN-EN 55015	

EMBALLASJE

Mål i mm



1000st