



# SYSTEMEO SLIM

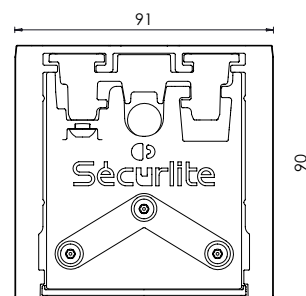

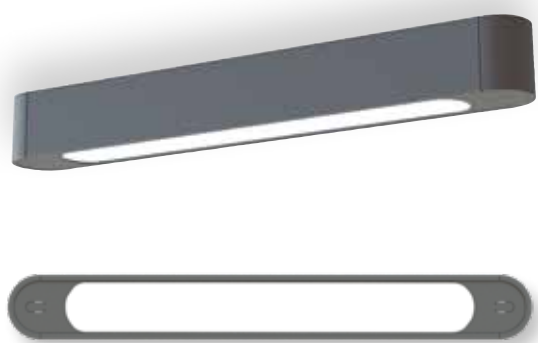


## CHARACTERISTICS

- IP65 rated waterproof luminaire with high impact-resistance IK11\*/80 J rated curved aluminium profile.
- Opalescent or clear diffuser with louvres or with optics
- Can be suspension mounted using a mounting kit made from shiny, nickel-plated brass, with 3m stainless steel finger line supplied as standard
- Not apparent quick power connection
- Fine texture RAL 7016 anthracite grey ● finish

## OPTIONS AVAILABLE ON REQUEST

- Motion detector adjustable via radio-control or smartphone
- Pack emergency version available
- High UV resistance or anti-graffiti coating
- Through wiring
- Side cable entry

Optional mounting support available to order separately:  
- Suspension mounting: 9854 0002

 Vandal-proof tool available to order separately.  
Inset code M4: 9800 0036  
+

Inset code M5: 9800 0012



Radio-control for wireless control available to order separately.  
Code: 9800 0010

## SYSTEO SLIM – Opalescent

220-240 V AC / 50/60 Hz



 direct 774

Length L (mm)	Power rating (W)	Luminaire light output (lm) 4000 K*	Luminaire efficacy (lm/W)	Opalescent
1017	9	850	97	5708 14--
1017	14	1400	100	5702 14--
1017	26	2700	104	5703 14--
1297	19	1950	103	5704 14--
1297	37	3800	103	5705 14--

**Durability:** L80B10 / over 72 000 hours  
L90B50 / 50 000 hours

\* For precise figures, please refer to the technical data sheet.  
UGR rating to be confirmed by a lighting study.

**Codification for 3000 K colour temperature:**  
replace the figure 4 by a 3.

for instance 4000K: 5702 14--  
3000K: 5702 13--

**Codification:** replace the two dashes (--) by the appropriate figures:  
for instance 5702 14--

- 00 NO DETECTION
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 21 DALI DIMMABLE + SWITCH DIMMING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

**SYSTEO SLIM – Clear, with louvres**

220-240 V AC / 50/60 Hz



direct 774

For ceiling mounting or suspension versions only

Length L (mm)	Power rating (W)	Luminaire light output (lm) 4000 K*	Luminaire efficacy (lm/W)	Clear
1017	11	1400	127	5736 14--
1017	16	2000	125	5737 14--
1297	16	2100	131	5738 14--
1297	26	3300	127	5739 14--

**Durability:** L80B10 / over 72 000 hours  
L90B50 / 50 000 hours

\* For precise figures, please refer to the technical data sheet  
UGR rating to be confirmed by a lighting study.

**Codification for 3000 K  
colour temperature:**  
replace the figure 4 by a 3.

for instance 4000K: 5736 14--  
3000K: 5736 13--

**Codification** replace the two dashes (--)  
by the appropriate figures:  
for instance 5736 14--

00 NO DETECTION  
21 DALI DIMMABLE + SWITCH DIMMING

**SYSTEO SLIM – Clear, with optics**

220-240 V AC / 50/60 Hz



direct 774

For ceiling mounting or suspension versions only

Length L (mm)	Power rating (W)	Luminaire light output (lm) 4000 K*	Mounted clear 40° optics	Mounted clear 60° optics	Mounted clear 90° optics	Mounted clear batwing optics	Mounted clear wallwasher optics
1017	9	1050	5714 14--	5719 14--	5724 14--	5729 14--	5734 14--
1017	14	1750	5711 14--	5716 14--	5721 14--	5726 14--	5731 14--
1297	16	2450	5712 14--	5717 14--	5722 14--	5727 14--	5732 14--

**Durability:** L80B10 / over 72 000 hours  
L90B50 / 50 000 hours

\* For precise figures, please refer to the technical data sheet  
UGR rating to be confirmed by a lighting study.

**Codification for 3000 K  
colour temperature:**  
replace the figure 4 by a 3.

for instance 4000K: 5731 14--  
3000K: 5731 13--

**Codification:** replace the two dashes  
(--) by the appropriate figures:  
for instance 5731 14--

00 NO DETECTION  
16 WITH PRO DETECTION + RADIO-CONTROL  
21 DALI DIMMABLE + SWITCH DIMMING  
44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION  
WARNING  
45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY  
WARNING

