

RONDO




Design: Xavier Houy

Rondo, the luminaire with a timeless look, that's designed to last.

Surface or flush mounted, the most powerful and robust of the architectural luminaires for communal areas in residential properties and outdoors.

- ↘ **More powerful**
Up to 42 W fluorescent or LED 3000 lm.
- ↘ **More efficient**
Thanks to its lighting management: DALI ballasts and LED and fluorescent dimming solutions.
- ↘ **Greater savings**
With the new Sensor Pro detectors or twilight switches built in.

- 1 3.5 mm polycarbonate diffuser (120 J)
- 2 Vandal resistant screws
- 3 Marine-grade aluminium rip-out-resistant skirt
- 4 Supplied c/w sealing washers
- 5 Knock-out cable entries (2 sides, 1 central)

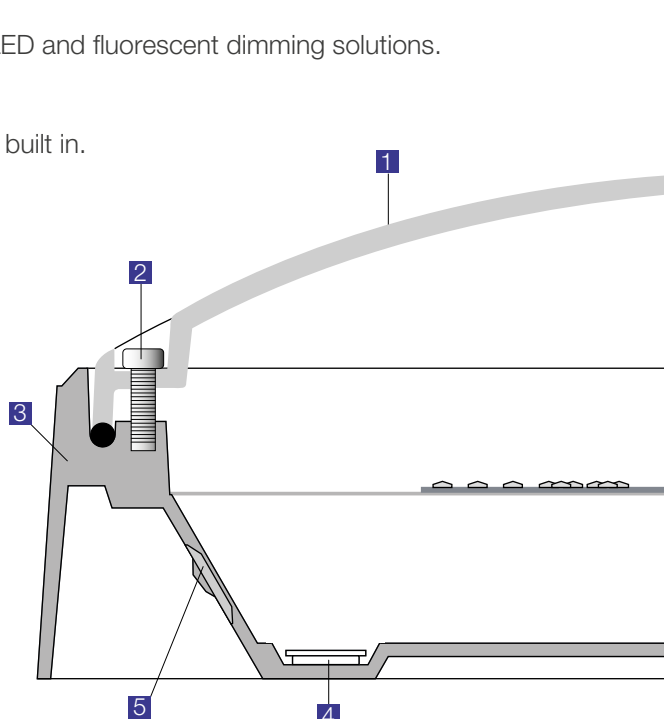

RONDO

IK10++ / 120 J




Surface or flush mounted,
the most powerful and robust
of the architectural luminaires.



Rondo

Rondino

Features:



- Architectural luminaire, 120-joules resistance
- Available in two sizes
- Die-cast marine-grade aluminium base
- Opal polycarbonate diffuser (except for Rondo fluo: clear frosted)
- CCT 4000 K, IRC min. 80
- Stainless steel vandal-resistant screws
- Plug-in gear tray




Options available on request:

- 3000 K LEDs
- Version with emergency pack
- Standby LED
- Class 2
- Twilight photocell

Vandal-resistant tool (bit) to be ordered separately
code: 9800 0003

Radio remote control to be ordered separately
code: 9800 0010




ø 330 mm (Rondo)
ø 270 mm (Rondino)




114 mm (Rondo)
97 mm (Rondino)

Rondo - code: 2520 0400

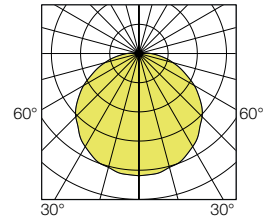

Rondino - code: 2560 0400

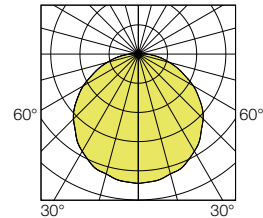

Rondino LED

i direct 256

220-240 V AC / 50/60 Hz   RoHS

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
LED 1200	9	900	100	2561 04 ..	2561 14 ..	2561 24 ..
LED 2000	13	1450	112	2560 04 ..	2560 14 ..	2560 24 ..

Lifetime: L80B50 / 50,000 h

Coding:

replace the two dashes (--) by the corresponding figures: e.g. 2561 04 ..

- 00 no detection
- 20 DALI dimmable
- 12 with Pro detection
- 13 with Pro detection + extinction or standby warning
- 16 with Pro detection + radio-control
- 17 with Pro detection + extinction or standby warning + radio-control
- 03 slave version + extinction or standby warning
- 07 slave version + extinction or standby warning + radio-control

Rondino FLUO

i direct 259

220-240 V AC / 50/60 Hz / cos ϕ > 0.95   RoHS

Designation	Base	White	Grey	Black
1 x 18 W TC-DE	G24q-2	2590 04 ..	2590 14 ..	2590 24 ..

Supplied c/w lamps (4000 K)

Coding:

replace the two dashes (--) by the corresponding figures: e.g. 2590 04 ..


- 00 no detection
- 12 with Pro detection

Additional options Rondino

Coding:

add the corresponding suffix to the product code: e.g. 2561 0400

- 9702 stainless steel crosspoint screws (VK54)
- 9802 flush-mounting version

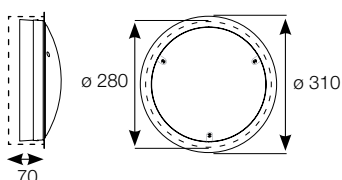

Flush-mounting dimensions:
Rondino: \varnothing 280 mm x 70 mm

Rondino accessories



Aki grille



Akita grille



Rueda grille

Designation	White	Grey	Black
AKI grille kit	9825 0003	9825 0002	9825 0001
AKITA grille kit	9825 0006	9825 0005	9825 0004
RUEDA grille kit	9825 0009	9825 0008	9825 0007

The accessories kits must be ordered separately.