


VOILA ACCESS

up to
120 lm/W

A recycled, recyclable, and repairable luminaire, lighting in everyday life suitable for residential buildings.




Features:



- Low-consumption architectural luminaire
- Base and screw covers made from recycled polycarbonate
- Opal polycarbonate diffuser
- Stainless steel crosspoint screws
- Side and rear cable entries
- CCT 4000 K, CRI min. 80
- Design: Xavier Houy
- 3-year guarantee

RAL9003

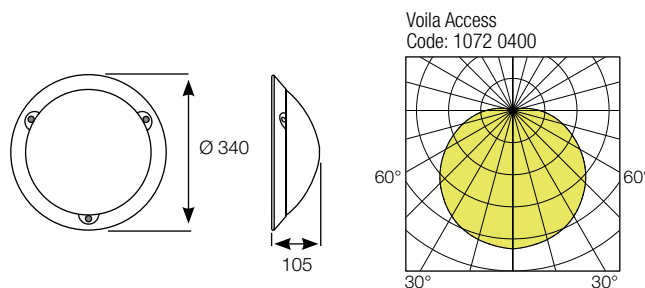

Voila Access
Code: 1072 0400

Vandal-resistant tool (bit) to be ordered separately
code: 9800 0003

VOILA Access



220-240 V AC / 50/60 Hz RoHS

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	White RAL9003
LED 1200	11	1090	99	1072 04 ..
LED 2000	17	1640	96	1073 04 ..
LED 2750	19	2330	122	1074 04 ..

Lifetime: L70B50 / 50,000 h

VOILA Access Asymmetric (wall-mounted only)



220-240 V AC / 50/60 Hz RoHS

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	White RAL9003
LED 2600	16	2110	132	1076 04 ..
LED 3600	23	2920	127	1075 04 ..

Lifetime: L70B50 / 50,000 h

Coding:

replace the two dashes (--) by the corresponding figures: e.g **1072 04 ..**

- 00** no detection
- 10** with détection

Additional options Voila Access

Coding:

add the corresponding suffix to the product code: e.g. **1072 0400**

- 9702** stainless steel crosspoint screws (VK24)